

Polished Rod Clamps

Plainsman's Polished Rod Clamps are a high quality, high strength, yet lightweight and easy to use clamp. Available in single, double and triple bolt sizes to handle every well application. Now with 20% more holding power thanks to a proprietary hard coating that provides abrasion and corrosion resistance to maximize life.

Features

- Indentation style
- Forged steel construction for high strength
- Precision machined parallel faces and perpendicular rod bore
- Hard black coating
- Industry leading clamping capacity

TYPES	WORKING LOAD	MAX TEST LOAD	SIZES	BOLT TORQUE	HEIGHT	BODY MATERIAL	SHIPPING WEIGHT
Single Bolt	16,000 lb	33,000 lb	1-1/8" 1-1/4" 1-1/2"	250 lb-ft	2.45"	Forged Alloy Steel	4.25 LBS
Double Bolt	32,000 lb	66,000 lb	1-1/8" 1-1/4" 1-1/2"	250 lb-ft	4.90"	Forged Alloy Steel	8.25 LBS
Triple Bolt	45,000 lb	76,000 lb	1-1/8" 1-1/4" 1-1/2"	250 lb-ft	7.35″	Forged Alloy Steel	12.5 LBS




Phone: 780-496-9800 Fax: 780-463-9800 Toll Free: 1-877-448-0586 www.plainsmanmfg.com





Clamping Capacity Tests*

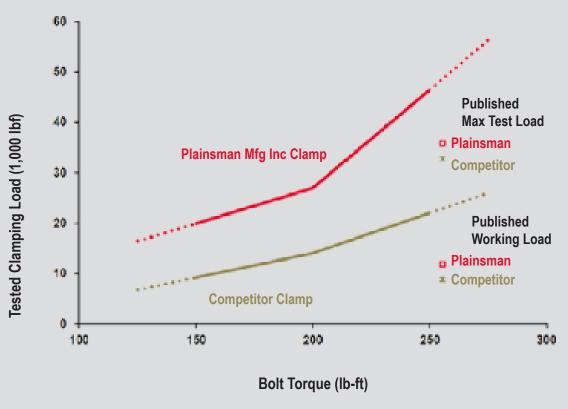

*Based on actual test results with calibrated equipment, new 1-1/4" single bolt clamps, and new polished rods

NOTES:

- Clamping capacity for illustrative purposes only. Always use specified bolt torque and working loads.
- 2. Do not clamp on hard surfaced, or spray metal sections of polished rods as it may not clamp properly or may damage the rod.

Ordering Information

- 1. Determine the working load requirements
- 2. Specify the polished rod diameter
- 3. Specify single, double or triple bolt based on working load



Phone: 780-496-9800 Fax: 780-463-9800 Toll Free: 1-877-448-0586 www.plainsmanmfg.com